

Shinson-1000-MV

Shinson PV Station ➤ For **1500 V** string inverter 330K and 330K-5G



Integrated delivery

- Mainstream 1MW subarray, widely used global
- 20 foot standard container delivery, easy to transport

Convenient installation

- A complete solution, from inverter to main step-up transformer
- When the container is lifted to the foundation, only LV and MV cables need to be connected


Reliable products

- LV panel, transformer and RMU be placed independently
- Adopt international first-line brand equipment with reliable quality

Easy O&M

- Full frontal maintenance design
- Modular design of MV equipment, easy to replace

» CIRCUIT DIAGRAM

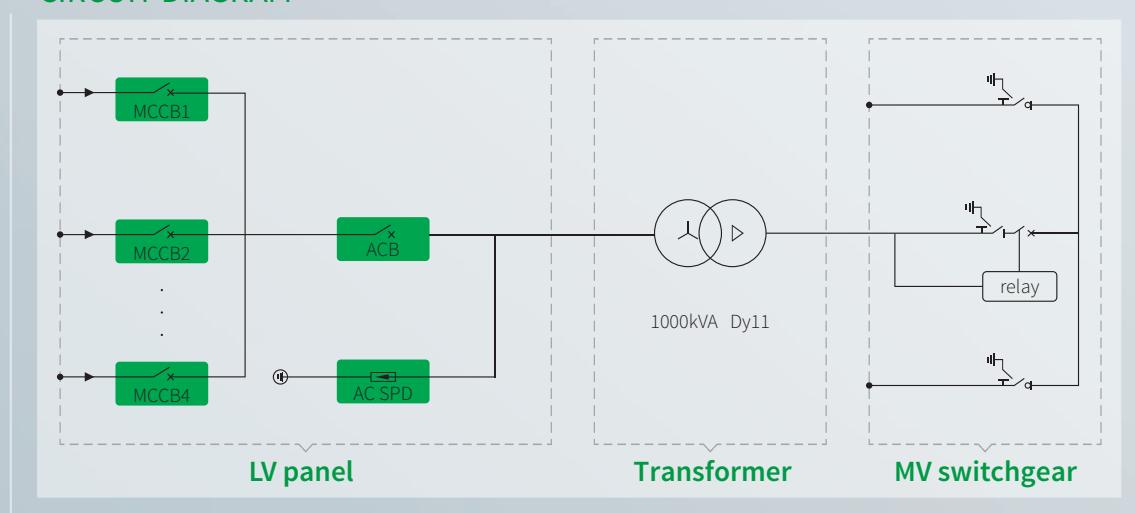

Datasheet

Model Name	Shinson-1000-MV
LV panel	
MCCB specification	250 A / 800 Vac / 3P, 4 pcs
ACB specification	1000 A / 800 Vac / 3P, 1 pcs
Connection form with transformer	Copper busbar
Transformer	
Transformer type	Oil immersed
Rated output power	1000 kVA @ 40°C
Max output power	1100 kVA @ 40°C 3h
LV/MV voltage	0.8 kV / 20-35 kV
Maximum input current	736 A
Tapping on HV	±2*2.5%
Vector group	Dy11
Frequency	50 Hz / 60 Hz
cooling type	ONAN
Impedance	6.5%
Oil type	Mineral oil (Optional: plant oil)
Winding material	Al (Optional: Cu)
Insulation class	A
Connection form with MV switchgear	Cable
MV Switchgear	
Type of insulate	SF6
Rate voltage	24-36 kV
Rate current	630 A
internal arcing fault	20 kA / 1 s
Qty of feeder	3 feeders
Protection	
LV surge protection	AC type I+II
AC input protection	Circuit breaker
Transformer protection	Oil-temperature, oil-level, oil-pressure
Fire protection	Smoke detection, emergency lighting
General Data	
Dimensions (W*H*D)	6058*2896*2438 mm
Approximate weight	12 T
Operating temperature range	-25 ~ +60°C
Operating altitude	1000 m (standard)
Auxiliary power supply	5 kVA / 230 V (Optional: max. 40 kVA)
UPS	1 kVA 30 min (Optional: max. 2 kVA 2h)
Degree of protection	IP54
Allowable relative humidity range	0-95%
Communication	RS485, Ethernet, Optical fiber
Compliance	IEC 60076, IEC 62271, IEC61439