



Product Service


CERTIFICATE

No. Z2 122610 0003 Rev. 00

Holder of Certificate: **Shinson Technology Co.,Ltd**

Block#201, No.9 Chuangye Road
213000 Changzhou, Jiangsu
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

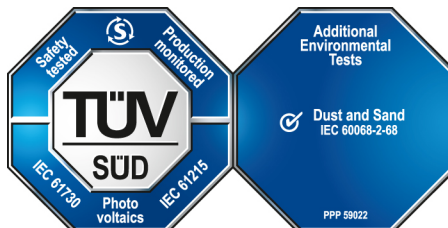

Product:

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 701262322401-01

Valid until: 2029-04-17

Date, 2024-06-17

(Zhulin Zhang)

CERTIFICATE

No. Z2 122610 0003 Rev. 00

Model(s):

SxxxM72P3BF (xxx=525-560 in step of 5W)
 SxxxM50P4BF (xxx=480-510 in step of 5W)
 SxxxM66P4BF (xxx=635-675 in step of 5W)
 SxxxM60P4BF (xxx=580-615 in step of 5W)
 SxxxM60P3BF (xxx=465-480 in step of 5W)
 SxxxM72P3 (xxx=530-550 in step of 5W)
 SxxxM72NT3BF (xxx=550-620 in step of 5W)
 SxxxM54P3 (xxx=400-410 in step of 5W)
 SxxxM10C (xxx=355-365 in step of 5W)
 SxxxM60P2B (xxx=360-380 in step of 5W)
 SxxxM66P4BF (xxx=675-700 in step of 5W)
 SxxxM60P4BF (xxx=615-635 in step of 5W)
 SxxxT54P3BF (xxx=415-445 in step of 5W)
 SxxxM66HT4BF (xxx=675-715 in step of 5W)
 SxxxN60BPV (xxx=460-480 in step of 5W)
 SxxxM66P4BF (xxx=505-570 in step of 5W)
 SxxxM60P4BF (xxx=460-520 in step of 5W)
 SxxxM54NF4BF (xxx=415-465 in step of 5W)
 xxx is standing for rated output power at STC

Black series:

SxxxN48BPV (xxx=355-365 in step of 5W)
 SxxxM54P3BF (xxx=395-415 in step of 5W)
 SxxxM54NF3BFB (xxx=415-445 in step of 5W)
 SxxxM66NT4BF (xxx=675-715 in step of 5W)
 SxxxM60NT3B (xxx=460-480 in step of 5W)
 SxxxM54N3BFB (xxx=415-435 in step of 5W)
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed, double glass with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class C according to UL790
Dust and Sand Test Method:	Lc1
Dust/sand type:	95% SiO ₂
Dust/sand concentration:	5g/m ³
Testing Air Velocity:	20m/s
Test Duration:	4h/each side

Tested

IEC 61215-1:2021
 IEC 61215-1-1:2021
 IEC 61215-2:2021
 IEC 61730-1:2016
 IEC 61730-2:2016
 PPP 59022B:2021